

Product Selector 2007/08

Glazed Rooflighting

Glass Rooflights

Large Area Glazing

Suntube

Roof Windows

Automatic Opening Vents

Accessories



Cox Building Products Limited was formed in 1936.

We have been manufacturing roof glazing systems since the 1950's and have earned a global reputation as a first class designer and manufacturer.

As the established leading thermoplastic rooflight supplier in the UK, Cox Building Products is proud to offer natural light and ventilation solutions that are recognised as benchmark standards in product, quality and service.



Please note orders are only accepted in writing, by fax, e-mail or post.

For details of items not shown, please call the sales office.
For Area Sales Contact Numbers please see page 26.

All sizes and dimensions are quoted in millimetres.

Normal trading terms apply (see page 25).

Visit our website at: www.coxbp.com

Detailed literature is available via the sales office.

Cox Building Products Limited
Unit 1, Shaw Road, Bushbury
Wolverhampton WV10 9LA

Tel: 01902 371800
Fax: 01902 371810
Email: sales@coxdome.co.uk

- ◆ Comprehensive range of products allowing natural light into your room/office from pitched or flat roofs
- ◆ Nationwide coverage
- ◆ 48 hour delivery on all standard products
- ◆ 70 years experience in the business, manufacturing the best-quality products in the market
- ◆ Full after sales service



Sustainability & Environment

We care about our environment and are actively engaged in improving our products to ensure they meet the highest standards such as Part L of the building regs 2006 – helping to reduce the carbon footprint.



Contents



4-5	Coxdome 2000
6-7	Coxdome Mark 5
8-9	Coxdome Trade Range
10-11	Coxdome TPX Range
12-13	Coxdome Galaxy Range
14-15	Cox Glass Ridgelights and Pyramids
16-17	Coxspan
18-19	Cox Suntube
20-21	Cox Windows
22-23	Cox Automatic Opening Vents
24	Accessories
25	Terms and Conditions of Sale
26	Area Sales Territories Sales Contact Numbers Warranty

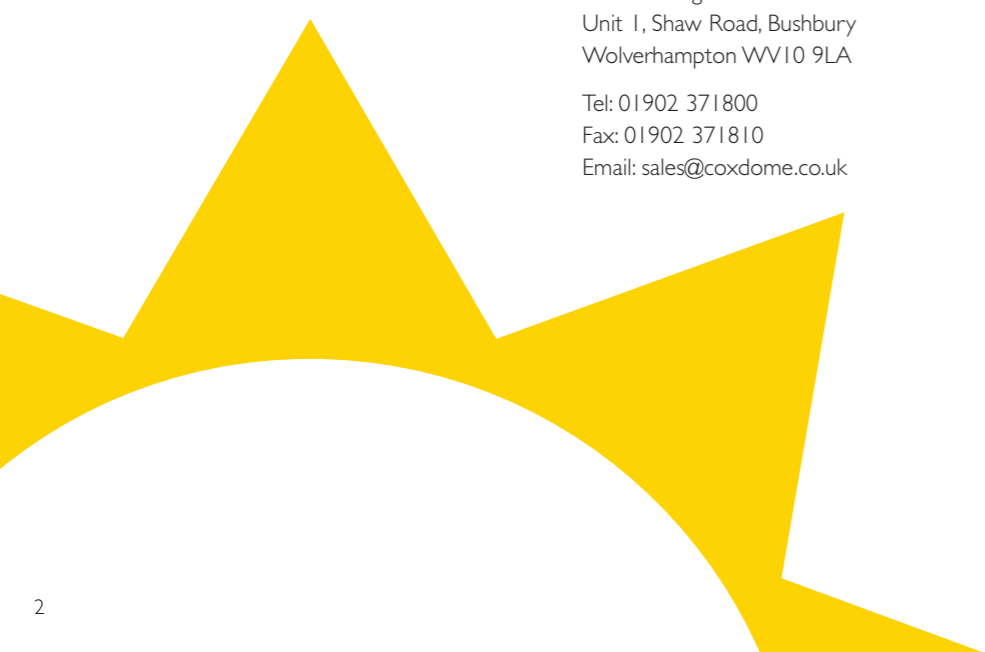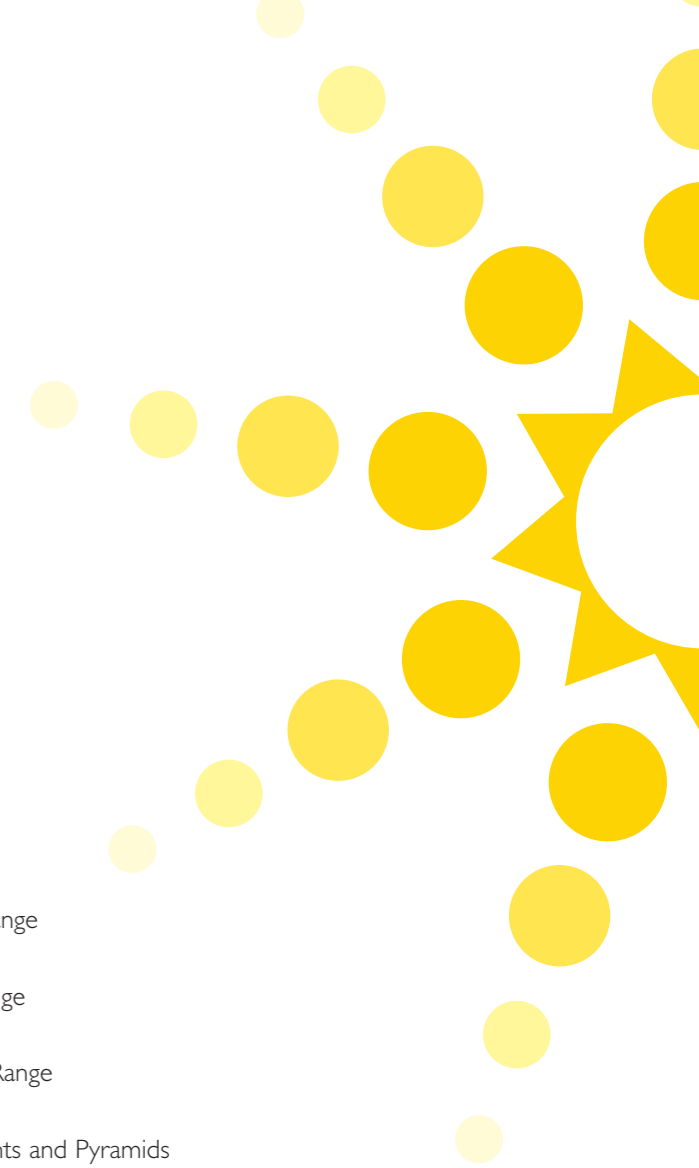

COXDOME 2000

The ultimate in rooflight design, the Coxdome 2000 can be confidently specified for most applications. A PVCu fully insulated unit, providing complete thermal efficiency with double or triple skin polycarbonate glazing as standard; it is particularly suitable for use in areas where there may be a risk of condensation. To assist in the dispersal of humid air, we recommend the use of the hinged ventilation units.

- ◆ A thermally proven Part L 2006 compliant product (in triple skin) to meet current building regulations for energy efficiency
- ◆ Suitable for any roofing application
- ◆ PVC edgeframe and 15mm gap between skin to eliminate cold bridging
- ◆ Complies to current BS476 fire rating
- ◆ Complies with current CDM Health & Safety requirements when supplied with PVCu upstand
- ◆ Unique, concealed snap fixings for added security

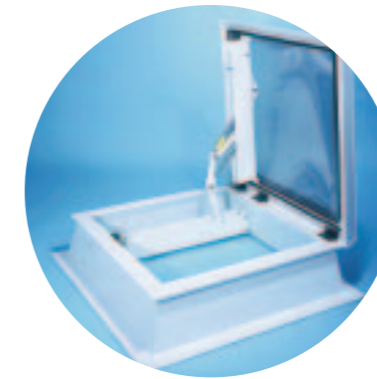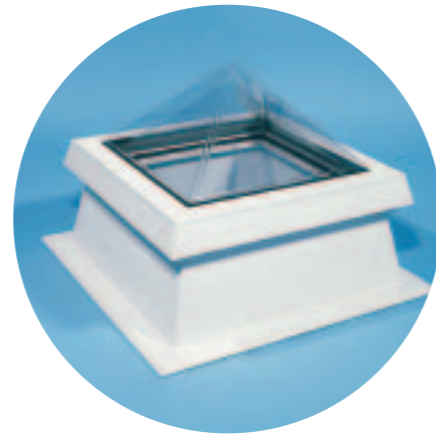

2000 RANGE																	
Opening Dimension (mm)	Glazing				Roof Mounting		Ventilation			Access	Smoke Dispersal			Extras			
	Double Skin Dome	Double Skin Pyramid	Triple Skin D or P	Quad Skin D or P	235 mm	Kerb Adaptor	Manual Hinge	Electric Hinge	Trickle	Manual	Pyrovent	Battery Back-Up	Wind Down	Comfort Pack	Operating pole	Burglar Bars	
600 x 600	○	○	○	○	○	○	○	○	○	n/a	n/a	n/a	n/a	○	○	○	
750 x 750	○	○	○	○	○	○	○	○	○	n/a	n/a	n/a	n/a	○	○	○	
900 x 900	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
1050 x 1050	○	○	○	○	○	○	○	○	○	n/a	n/a	n/a	n/a	○	○	○	
1200 x 1200	○	○	○	○	○	○	○	○	○	n/a	n/a	n/a	n/a	○	○	○	
1500 x 1500	○	○	○	○	○	○	○	○	○	n/a	n/a	n/a	n/a	○	○	○	
1800 x 1800	○	○	○	○	○	○	○	○	○	n/a	n/a	n/a	n/a	○	○	○	
600 x 900	○	○	○	○	○	○	○	○	○	n/a	n/a	n/a	n/a	○	○	○	
600 x 1200	○	○	○	○	○	○	○	○	○	n/a	n/a	n/a	n/a	○	○	○	
750 x 900	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
900 x 1200	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	
1050 x 1500	○	○	○	○	○	○	○	○	○	n/a	n/a	n/a	n/a	○	○	○	
1200 x 1800	○	○	○	○	○	○	○	○	○	n/a	n/a	n/a	n/a	○	○	○	
1200 x 2400	○	○	○	○	○	○	○	○	○	n/a	n/a	n/a	n/a	○	○	○	

- ◆ Glazing available clear or obscure at no extra cost, bronze and opal available on request
- ◆ The Pyrovent offers an automatic smoke-venting unit
- ◆ Cool & Clear available as standard option – please call sales office

- Delivery within 48hrs when order placed before 12 noon (order of 20 units or less)
- Delivery within 5-7 working days

Note:
Upstands are required for Trickle Vents, Access Units and Pyrovents.



COXDOME MARK 5

A highly versatile and functional system, offering a tough extruded aluminium construction with built-in-security, a large variety of ventilation options in double/triple skin glazing. Ideal for security conscious applications.

- ◆ Unique, snap fit system allowing a multi-faceted rooflight
- ◆ Suitable for all current water-proofing systems
- ◆ A 'fit-and-forget' rooflight - highly durable and low maintenance
- ◆ Unique, vandal proof security fixing system
- ◆ Complies to current BS476 fire rating
- ◆ Complies to current CDM Health & Safety requirements

MARK 5 – Ideal for commercial and industrial use																						
Opening Dimension (mm)	Polycarbonate Glazing				Upstand 200mm				Adaptor	Ventilation Options								Access		Extras		
	D/Skin Dome	D/Skin Pyramid	T/Skin D or P	Q/Skin D or P	Plain Upstand	Plain Insulated Upstand	Ribbed Upstand	Ribbed Insulated Upstand		Hit & Miss Vents x 2	Hit & Miss Vents x 4	Perm Vent 2 Sides	Perm Vent 4 Sides	Powered Vent	Stimline COSD	Manual Hinge	Electric Hinge	Solid Top	External Operation	Manual	Burglar Bars	Operating pole
600 x 600	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	n/a	n/a	○	○	○
750 x 750	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	n/a	n/a	○	○	○
900 x 900	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	n/a	n/a	○	○	○
1050 x 1050	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	n/a	n/a	○	○	○
1200 x 1200	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	n/a	n/a	○	○	○
1500 x 1500	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	n/a	n/a	○	○	○
1800 x 1800	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	n/a	n/a	○	○	○
600 x 900	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	n/a	n/a	○	○	○
600 x 1200	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	n/a	n/a	○	○	○
750 x 900	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	n/a	n/a	○	○	○
900 x 1200	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	n/a	n/a	○	○	○
1050 x 1500	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	n/a	n/a	○	○	○
1200 x 1800	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	n/a	n/a	○	○	○
1200 x 2400	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	n/a	n/a	○	○	○

- ◆ Glazing available clear or obscure at no extra cost, bronze and opal available on request
- ◆ For Polyester Powder Coating please contact sales office for availability and colour choice

Note:
A blank section is required when Hinged Vents or an Access Hatch is fitted to a Kerb Adaptor. This is priced as a Perm 2 sides Vent Section.



- Delivery within 48hrs when order placed before 12 noon (order of 20 units or less)
- Delivery within 5-7 working days



COXDOME TRADE RANGE

The Coxdome Trade Range is a high quality, universal rooflight system. The range is based on either 150mm, 235mm or 300mm PVCu insulated upstands with a double/triple skin polycarbonate glazing, which provides excellent thermal efficiency.

- ◆ A quality, economical Part L 2006 compliant rooflight when supplied with an upstand with a triple skin dome
- ◆ Suitable for any roofing application
- ◆ Maintenance free PVCu construction
- ◆ Security fixings supplied as standard
- ◆ Complies to current BS476 fire rating
- ◆ Complies to current CDM Health & Safety requirements

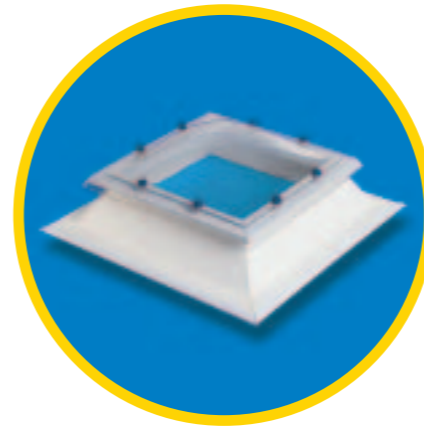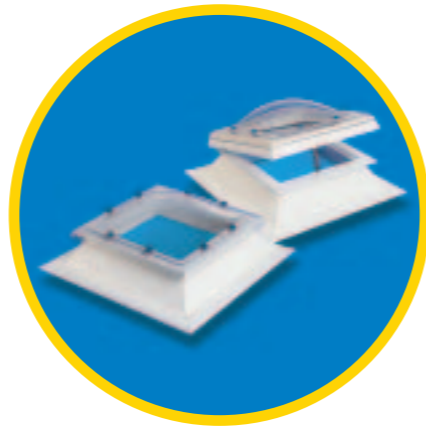




TRADE RANGE – Ideal for the domestic market, schools, offices & warehouses															
Opening Dimension (mm)	Glazing				Roof Mounting			Ventilation			Access	Extras			
	Double Skin Dome	Double Skin Pyramid	Triple Skin D or P	Quad Skin D or P	150mm	235mm	300mm	Manual Hinge	Electric Hinge	Trickle (300 235)	Manual	Burglar Bars	C/pack	O/pole	Secure
630 x 630	●	●	●	○	●	●	●	●	●	●	n/a	●	●	●	●
780 x 780	●	●	●	○	●	●	●	●	●	●	n/a	●	●	●	●
930 x 930	●	●	●	○	●	●	●	●	●	●	●	●	●	●	●
1080 x 1080	●	●	●	○	●	●	●	●	●	●	n/a	●	●	●	●
1230 x 1230	●	●	●	○	●	●	●	●	●	●	●	●	●	●	●
1530 x 1530	●	●	●	○	●	●	●	●	●	●	n/a	●	●	●	●
1830 x 1830	○	○	○	○	○	○	○	○	○	○	n/a	○	○	○	○
630 x 930	●	●	●	○	●	●	●	●	●	●	n/a	●	●	●	●
630 x 1230	●	●	●	○	●	●	●	●	●	●	n/a	●	●	●	●
630 x 1830	○	○	○	○	○	○	○	○	○	○	n/a	○	○	○	○
780 x 930	●	●	●	○	●	●	●	●	●	●	n/a	●	●	●	●
930 x 1230	●	●	●	○	●	●	●	●	●	●	●	●	●	●	●
930 x 1830	○	○	○	○	○	○	○	○	○	○	n/a	○	○	○	○
1080 x 1530	●	●	●	○	●	●	●	●	●	●	n/a	●	●	●	●
1230 x 1830	○	○	○	○	○	○	○	○	○	○	n/a	○	○	○	○
1230 x 2430	●	●	●	○	●	●	●	●	●	●	n/a	●	●	●	●

TRADE RANGE KERB ADAPTOR – Ideal for the domestic market, schools, offices & warehouse														
Opening Dimension (mm)	Glazing				Kerb Adaptor	Ventilation			Access	Extras				
	Double Skin Dome	Double Skin Pyramid	Triple Skin Dome or Pyramid	Quad Skin Dome or Pyramid		Manual Hinge	Electric Hinge	Trickle	Manual	Burglar Bars	C/pack	O/pole	Secure	
630 x 630	●	●	●	○	●	●	●	●	n/a	●	○	●	●	●
780 x 780	●	●	●	○	●	●	●	●	n/a	●	○	●	●	●
930 x 930	●	●	●	○	●	●	●	●	n/a	●	○	●	●	●
1080 x 1080	●	●	●	○	●	●	●	●	n/a	●	○	●	●	●
1230 x 1230	●	●	●	○	●	●	●	●	n/a	●	○	●	●	●
1530 x 1530	●	●	●	○	●	●	●	●	n/a	●	○	●	●	●
1830 x 1830	●	●	●	○	●	●	●	●	n/a	●	○	●	●	●
630 x 930	●	●	●	○	●	●	●	●	n/a	●	○	●	●	●
630 x 1230	●	●	●	○	●	●	●	●	n/a	●	○	●	●	●
630 x 1830	○	○	○	○	○	○	○	○	○	○	n/a	○	○	○
780 x 930	●	●	●	○	●	●	●	●	●	●	○	●	●	●
930 x 1230	●	●	●	○	●	●	●	●	●	●	○	●	●	●
930 x 1830	○	○	○	○	○	○	○	○	○	○	n/a	○	○	○
1080 x 1530	●	●	●	○	●	●	●	●	n/a	●	○	●	●	●
1230 x 1830	●	●	●	○	●	●	●	●	n/a	●	○	●	●	●
1230 x 2430	●	●	●	○	●	●	●	●	n/a	●	○	●	●	●

- ◆ Glazing available clear or obscure at no extra cost, bronze and opal available on request
- ◆ Hinged units including access available with 150mm & 300mm upstands only

- Delivery within 48hrs when order placed before 12 noon (order of 20 units or less)
- Delivery within 5-7 working days


Note:
 235mm Upstands available only with Trickle Vents and Domes
 150mm Upstand is not available with Trickle Vents

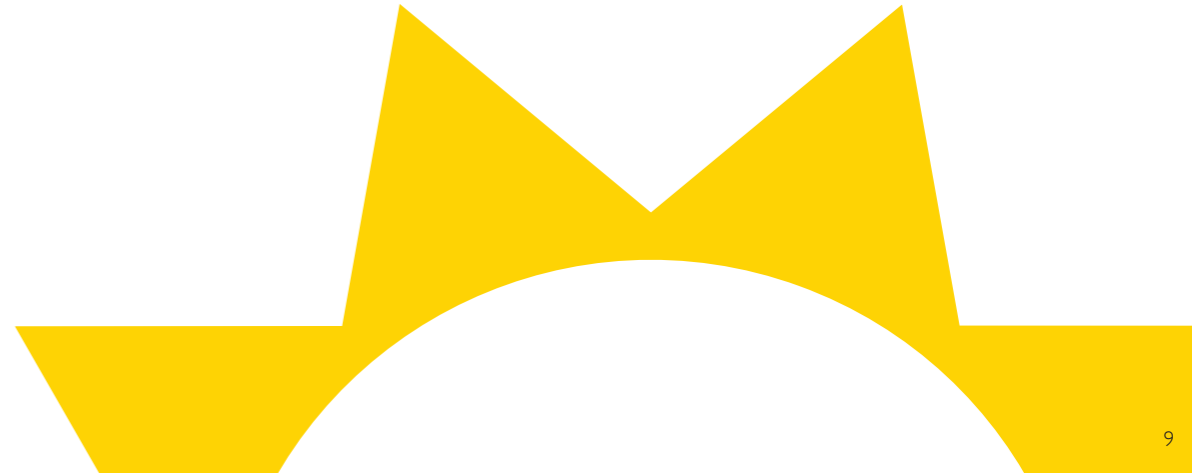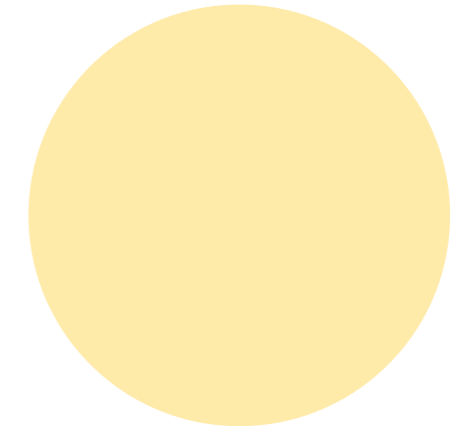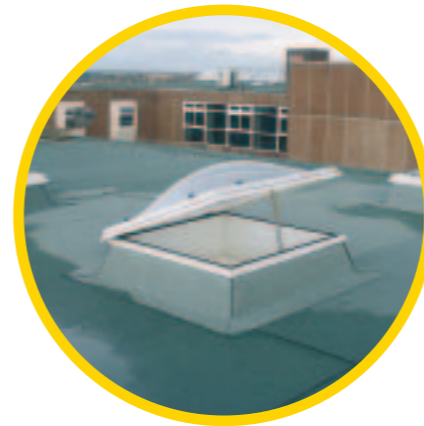

COXDOME TPX RANGE

A functional and economic rooflight range that is particularly suitable for utility type applications, such as workshops, warehouses, factories and school roofing projects. They are also ideal for refurbishment onto existing upstands that are often encountered on schools and hospitals. In areas of high humidity careful selection of type is required. Ventilation in the upstand will help in dispersing condensation.

- ◆ Matrix and Link systems are available to produce larger feature rooflights
- ◆ Low maintenance and highly durable construction
- ◆ Security fixings supplied as standard
- ◆ Circular units supplied with triple skin domes meet Part L 2006 requirements
- ◆ Complies to current BS476 fire rating
- ◆ Complies to current CDM Health & Safety requirements

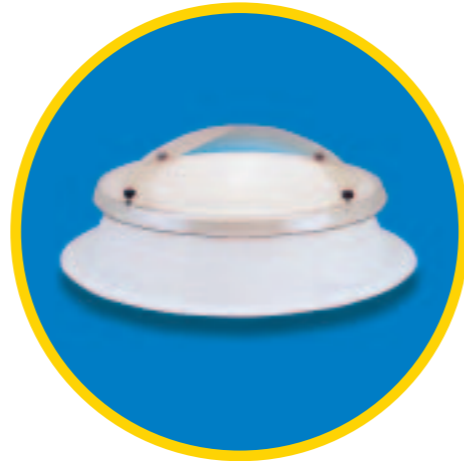

Opening Dimension (mm)	Glazing							Roof Mounting				Insulation		Ventilations			Access		Extras			
	S/Skin Dome	D/Skin Dome	T/Skin Dome	S/Skin Pyramid	D/Skin Pyramid	T/Skin Pyramid	Q/Skin D or P	175mm Upstand	270mm Upstand	350mm Upstand	220mm Kerb Adaptor	Insulation	High Performance Insulation	Permanent	Open Closed	Manual Hinge	Electric Hinge	Manual	TPX Secure	Burglar Bars	Comfort Pack	Operating pole
600 x 600	●	●	●	●	●	●	○	●	○	○	▲	●	○	●	○	●*	●*	n/a	●	●	○	●
750 x 750	●	●	●	●	●	●	○	●	○	○	▲	●	○	●	○	●*	●*	n/a	●	●	○	●
900 x 900	●	●	●	●	●	●	○	●	○	○	▲	●	○	●	○	●*	●*	n/a	●	●	○	●
1050 x 1050	●	●	●	●	●	●	○	●	○	○	▲	●	○	●	○	●*	●*	n/a	●	●	○	●
1200 x 1200	●	●	●	●	●	●	○	●	○	○	▲	●	○	●	○	○	○	●*	●	●	○	●
1500 x 1500	○	○	○	○	○	○	○	○	○	○	▲	○	○	○	○	○	○	n/a	○	○	○	○
1800 x 1800	○	○	○	○	○	○	○	○	○	○	▲	○	○	○	○	○	○	n/a	○	○	○	○
600 x 900	●	●	●	●	●	●	○	●	○	○	▲	●	○	●	○	●*	●*	n/a	●	●	○	●
600 x 1200	●	●	●	●	●	●	○	●	○	○	▲	●	○	●	○	●*	●*	n/a	●	●	○	●
600 x 1800	○	○	○	○	○	○	○	○	○	○	▲	○	○	○	○	○	○	n/a	○	○	○	○
750 x 900	●	●	●	●	●	●	○	●	○	○	▲	●	○	●	○	●*	●*	●*	●	●	○	●
900 x 1200	●	●	●	●	●	●	○	●	○	○	▲	●	○	●	○	●*	●*	●*	●	●	○	●
900 x 1800	○	○	○	○	○	○	○	○	○	○	▲	○	○	○	○	○	○	n/a	○	○	○	○
1000 x 1500	○	○	○	○	○	○	○	○	○	○	▲	○	○	○	○	○	○	n/a	○	○	○	○
1200 x 1800	○	○	○	○	○	○	○	○	○	○	▲	○	○	○	○	○	○	n/a	○	○	○	○
1200 x 2400	○	○	○	○	○	○	○	○	○	○	▲	○	○	○	○	○	○	n/a	○	○	○	○

Diameter (mm)	Glazing		Upstand	Ventilation		GRP Liners	
	D/Skin Dome	T/Skin Dome	Upstand / \	Manual	Electric	0-60cm	60-100cm
650	●	●	●	▲	▲	▲	▲
850	●	●	●	▲	▲	▲	▲
950	●	●	●	▲	▲	▲	▲
1050	●	●	●	▲	▲	▲	▲
1150	●	●	●	▲	▲	▲	▲
1250	●	●	●	▲	▲	▲	▲
1550	○	○	○	▲	▲	▲	▲
1850	○	○	○	▲	▲	▲	▲
2050	○	○	○	▲	▲	▲	▲

Note:
In areas of high humidity careful selection of type is required.

- ◆ Glazing available clear or obscure at no extra cost, bronze and opal available on request
- ◆ 175 mm upstand can only be vented with a manual & electric hinge or manual access option
- ◆ 270 mm upstand can accommodate all ventilation options
- ◆ Fixing kits are issued at no cost for glazing to upstand and kerb adaptors
- ◆ Single skin domes are only available in clear as standard


- Delivery within 48hrs when order placed before 12 noon (order of 20 units or less)
- Delivery within 5-7 working days
- ▲ Delivery within 12-17 working days
- * Delivery within 48hrs only on 175mm upstand when order placed before 12 noon
- * High Performance insulation to give the upstand a U value of 2.2



COXDOME GALAXY RANGE

The Galaxy range has a 100mm flange that enables it to be fitted to existing kerbs of varying dimensions, ensuring that many rooflights can be replaced without the need for a kerb adaptor or adjustment made to the existing kerb. Kerb adaptors are available, for kerb sizes not covered – please contact the sales office.

- ◆ A versatile rooflight for refurbishment, reducing the requirement for re-waterproofing
- ◆ Easy to install with minimum disturbance
- ◆ Triple unit is Part L 2006 compliant
- ◆ Security fixings supplied as standard
- ◆ Complies to current BS476 fire rating

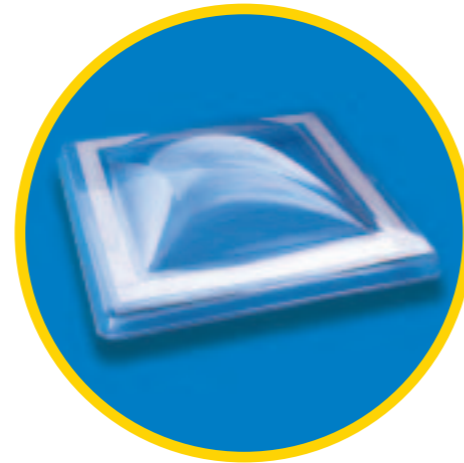

GALAXY DOME						
Overall Kerb dimension (mm)	Single Skin Clear	Double Skin Clear or Obscure	Triple Skin Clear or Obscure	Quadruple Skin Clear or Obscure	Minimum Kerb Sizes (mm)	Maximum Kerb Sizes (mm)
600 x 600	●	●	●	○	510 x 510	610 x 610
750 x 750	●	●	●	○	660 x 660	760 x 760
900 x 900	●	●	●	○	810 x 810	910 x 910
1050 x 1050	●	●	●	○	970 x 970	1070 x 1070
1200 x 1200	●	●	●	○	1120 x 1120	1220 x 1220
1500 x 1500	●	●	●	○	1420 x 1420	1520 x 1520
1800 x 1800	○	○	○	○	1730 x 1730	1830 x 1830
600 x 900	●	●	●	○	510 x 810	610 x 910
600 x 1200	●	●	●	○	510 x 1120	610 x 1220
600 x 1800	○	○	○	○	510 x 1730	610 x 1830
750 x 900	●	●	●	○	660 x 810	760 x 910
900 x 1200	●	●	●	○	810 x 1120	910 x 1220
900 x 1800	○	○	○	○	810 x 1730	910 x 1830
1050 x 1500	●	●	●	○	910 x 1420	1070 x 1520
1200 x 1800	○	○	○	○	1120 x 1730	1220 x 1830
1200 x 2400	●	●	●	○	1120 x 2340	1220 x 2440

◆ Single skin domes are only available in clear as standard

Galaxy Dome Size (mm)	Overall External Kerb Dimensions (mm)			Availability
	Minimum Kerb Size	Maximum Type A	Maximum Type B	
600 x 600	610 x 610	680 x 680	820 x 820	●
750 x 750	760 x 760	830 x 830	970 x 970	●
900 x 900	910 x 910	980 x 980	1120 x 1120	●
1050 x 1050	1070 x 1070	1140 x 1140	1270 x 1270	●
1200 x 1200	1220 x 1220	1290 x 1290	1430 x 1430	●
1500 x 1500	1520 x 1520	1590 x 1590	1730 x 1730	●
1800 x 1800	1830 x 1830	1900 x 1900	2040 x 2040	○
600 x 900	610 x 910	680 x 980	820 x 1120	●
600 x 1200	610 x 1220	680 x 1290	820 x 1430	●
600 x 1800	610 x 1830	680 x 1900	820 x 2040	○
750 x 900	760 x 910	830 x 980	970 x 1120	●
900 x 1200	910 x 1220	980 x 1290	1120 x 1430	●
900 x 1800	910 x 1830	980 x 1900	1120 x 2040	○
1050 x 1500	1070 x 1520	1140 x 1590	1270 x 1730	●
1200 x 1800	1220 x 1830	1290 x 1900	1430 x 2040	○
1200 x 2400	1220 x 2440	1290 x 2470	1430 x 2620	●



- Delivery within 48hrs when order placed before 12 noon (order of 20 units or less)
- Delivery within 5-7 working days



COX GLASS RIDGELIGHTS AND PYRAMIDS

Framed Glass Ridgelights and Pyramids, made from modern construction materials to give a traditional look.

- ◆ Supplied to site as pre-constructed framework ready to be glazed, or in kit form
- ◆ Lightweight framework, polyester powder coated in white
- ◆ Fits to pre-determined builders required sizes
- ◆ Opening ventilation bays are available at extra cost
- ◆ Alternative glazing specifications are available at extra cost
- ◆ Maintenance free replacement for traditional wooden systems

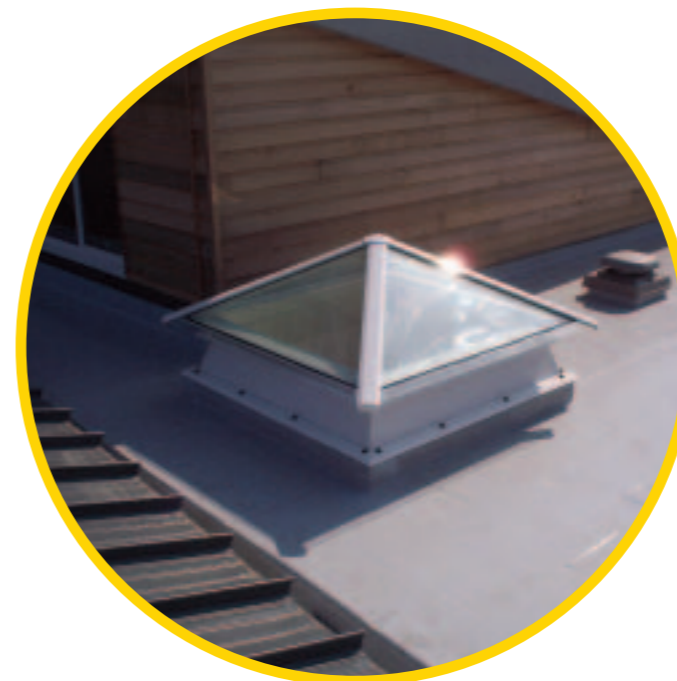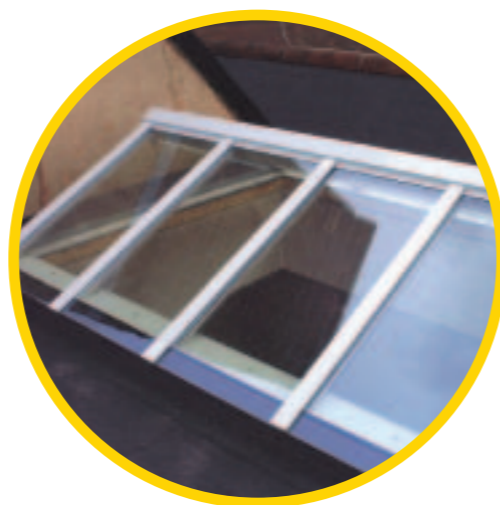

COXSPAN

Coxspan systems which include: Rooflights (glass and polycarbonate); Modular Roof Glazing and Barrel Vaults are ideal for hotels, shopping centres, leisure facilities, enclosed canopies and walkways. All are designed to be self-supporting with spans up to and over 6 metres.



COX SUNTUBE

Cox Suntube is a revolutionary way to pipe natural daylight from your rooftop into your home, office or school, to brighten areas from dusk to dawn where daylight from windows cannot reach. The Suntube is ideal for toilets, bathrooms, corridors, hallways, kitchens or any area too small to install traditional Coxdomes, but still in need of the benefits of natural light.

- ◆ Bringing energy free light into any home
- ◆ No heat loss in winter or solar gain in summer months
- ◆ No limit to the length of Cox Suntube, or number of bends used therefore suitable for all pitched and flat roofs
- ◆ No structural alterations required with refurbishment projects as the Suntube can be routed round existing roof support work
- ◆ Highly durable, low maintenance product
- ◆ Virtually burglar-proof and vandal resistant
- ◆ Self-cleaning and condensation free sun dome
- ◆ Simple installation – normally within 2-3 hours



The Cox Suntube is supplied in two versions, the Cox Suntube – Premier and the Cox Suntube – Ultra.

- ◆ **The Cox Suntube – Ultra** is supplied with a rigid, super reflective connection tube that provides superior light transmittance, even on cloudy days
- ◆ **The Cox Suntube – Premier** is supplied with a flexible connection* tube which provides ease of installation in even the most difficult of roof spaces, at an economical price

Cox Suntube – Ultra

Flat Roof Kit Contents

- ◆ Polycarbonate top dome
- ◆ ABS Flashing Plate (Felt/Membrane Kit)
- ◆ Galvanised Flashing Plate (Asphalt Kit)
- ◆ Standard 2ft (610mm) length of pipe
- ◆ 3mm plywood backing panel & template
- ◆ Bell end ceiling extension
- ◆ Recessed ceiling diffuser & ceiling trim
- ◆ Full installation pack

Pitch Roof Kit Contents

- Standard Kit (Pitch Roof up to 30° Pitch)
- ◆ Polycarbonate top dome
 - ◆ ABS Flashing Plate & Condensation Seal
 - ◆ Suntube 2ft (610mm) connecting piece
 - ◆ 2-section 30° or 45° adjustable elbow
 - ◆ Standard 2ft (610mm) length of pipe
 - ◆ 3mm plywood backing panel & template
 - ◆ Bell end ceiling extension
 - ◆ Recessed ceiling diffuser & ceiling trim
 - ◆ Lead flashing
 - ◆ Full installation pack

Bold Rolled Tile 30 Kit (Pitch roof up to 30° pitch)

Identical to Standard Kit except includes:

- ◆ Lead upstand and ABS collar (instead of lead and ABS flashing)

45 Degree Pitch Kit (Pitch roof up to 45° pitch)

Identical to Standard Kit except includes:

- ◆ 3 section 45° elbow (instead of 2 section 30° elbow)

Bold Rolled Tile 45 Kit (Pitch roof up to 45° pitch)

Identical to Standard Kit except includes:

- ◆ 3 section 45° elbow (instead of 2 section 30° elbow)
- ◆ Lead upstand and ABS collar (instead of lead and ABS flashing)



COX SUNTUBE – Ideal for areas where natural daylight can't reach					
COX SUNTUBE – Ultra (Rigid Tube)	Roof Type	230mm	300mm	450mm	530mm
Standard kit (up to 30 degree pitch)	Pitch	●	●	AOA	AOA
45 Degree Pitch Kit (up to 45 degree pitch)	Pitch	●	●	AOA	AOA
Bold Roll Tile 30 Kit (up to 30 degree pitch)	Pitch	●	●	AOA	AOA
Bold Roll Tile 45 Kit (up to 45 degree pitch)	Pitch	●	●	AOA	AOA
Flat Roof Kit (Felt/Membrane)	Flat	●	●	AOA	AOA
Flat Roof Kit (Asphalt)	Flat	●	●	AOA	AOA
COX SUNTUBE – Premier (Flexi Tube)	Roof Type	230mm	300mm	450mm	530mm
Standard kit	Pitch	n/a	●	AOA	AOA
Bold Roll Tile Kit	Pitch	n/a	●	AOA	AOA
Flat Roof Kit (Felt/Membrane)	Flat	n/a	●	AOA	AOA
Flat Roof Kit (Asphalt)	Flat	n/a	●	AOA	AOA

ACCESSORIES				
Product	230mm	300mm	450mm	530mm
Black Out Diffuser (Rigid/Flexible)	●	●	AOA	AOA
Light Kit (Rigid/Flexible)	●	●	AOA	AOA
Chrome/Brass Trim (Rigid/Flexible)	●	●	AOA	AOA
Lead Flashing	●	●	AOA	AOA
Rigid Extension Pipe	●	●	AOA	AOA
Flexible Extension Pipe	n/a	●	AOA	AOA
2 Section 30 degree Elbow	●	●	AOA	AOA
3 Section 45 degree Elbow	●	●	AOA	AOA

***Note:**
Premier kit includes flexible tube instead of rigid tube and bends.

- **Delivery within 48hrs when order placed before 12 noon (order of 20 units or less)**

AOA = Availability on application

COX WINDOWS

A premium quality Pitch window but at a competitive price. Backed by a 10 year guarantee.

Premier: An economical Part L 2006 compliant window.

Ultra: With an independent Trickle Vent and NHBC approval.



- ◆ Centre-pivot roof window sash can be rotated 165°
- ◆ Top-hung means of escape windows
- ◆ U-value of 1.1 W/m²K for glazed unit, 1.7 for entire window
- ◆ Double glazed thermo pane with argon filled gap



- ◆ Energy film on inside pane
- ◆ Polysulphide edge for energy saving
- ◆ Quality Nordic Pine frame
- ◆ Oxidised lightweight aluminium cladding
- ◆ Seven sizes available
- ◆ Tile and Slate flashings are universal and are available for all sizes

◆ **Minimum delivery of £500.00**
Orders below this are subject to a delivery charge of £50.00

◆ **Electric Packs and Comfort Packs** available within 12-17 working days

● **Delivery within 48hrs** when order placed before 12 noon (order of 20 units or less)

○ **Delivery within 5-7** working days

▲ **Delivery within 12-17** working days

Note:
All flashings are compatible with both Premier and Ultra ranges of windows.

Cox Window – Premier	
Window Code and Size	Availability
C2AP 55 x 78	●
C4AP 55 x 98	●
F6AP 66 x 118	●
M4AP 78 x 98	●
M6AP 78 x 118	●
M8AP 78 x 140	●
S6AP 114 x 118	●
MOEM4AP 78 x 98	○
MOEM8AP 78 x 140	○

Cox Window – Ultra	
Window Code and Size	Availability
C2AU 55 x 78	▲
C4AU 55 x 98	▲
F6AU 66 x 118	▲
M4AU 78 x 98	▲
M6AU 78 x 118	▲
M8AU 78 x 140	▲
S6AU 114 x 118	▲
MOEM4AU 78 x 98	▲
MOEM8AU 78 x 140	▲

Tile Flashing	
Flashing Code and Size	Availability
TFC2A 55 x 78	●
TFC4A 55 x 98	●
TFF6A 66 x 118	●
TFM4A 78 x 98	●
TFM6A 78 x 118	●
TFM8A 78 x 140	●
TFS6A 114 x 118	●

Slate Flashing	
Flashing Code and Size	Availability
SFC2A 55 x 78	●
SFC4A 55 x 98	●
SFF6A 66 x 118	●
SFM4A 78 x 98	●
SFM6A 78 x 118	●
SFM8A 78 x 140	●
SFS6A 114 x 118	●

Combi Flashing	
Flashing Code and Size	Availability
M6A 78 x 118	▲
M8A 78 x 140	▲

Blackout Blinds	
Flashing Code and Size	Availability
BBC2A 55 x 78	●
BBC4A 55 x 98	●
BBF6A 66 x 118	●
BBM4A 78 x 98	●
BBM6A 78 x 118	●
BBM8A 78 x 140	●
BBS6A 114 x 118	●



COX AUTOMATIC OPENING VENTS

In all buildings there is the need to remove smoke, quickly and effectively, in a fire. This is of paramount importance to allow the inhabitants time to escape and the fire brigade to enter the building.

- ◆ Choice of steel or PVCu upstands to suit a wide range of applications
- ◆ Two standard sizes to meet regulations:
 - 1200 x 1200 to achieve 1m² of free airflow
 - 1200 x 1800 to achieve 1.5m² of free airflow
- ◆ Bespoke sizes are available to achieve regulations
- ◆ Complete system available from one source
- ◆ Kerb adaptor is also available for refurbishment needs
- ◆ Part L 2006 compliant when specified with PVCu upstand and triple skin dome
- ◆ Can also be specified with ventilation and access hatch options
- ◆ Complies to current fire regulations (as per other units)
- ◆ Complies with CDM (as per other units)

Note:
Availability on application.



ACCESSORIES

- ◆ **Burglar Bars**
Available for all sizes

- ◆ **Long Arm Pole**
For open/close ventilation

- ◆ **Winding Pole**
For manual hinge ventilation

- ◆ **Window Operating Pole**
(Opening and blind)

- ◆ **Comfort Pack**
For automatic control of an electric hinge vent, the pack includes –

Control Panel
Rain Sensor
Temperature Sensor
Remote Control

Available in white or silver



Cox Building Products Terms and Conditions of Sale

1. Parties

In these conditions, Cox Building Products is called "the Company" and any individual firm, company or other party with whom the Company contracts is called "the Customer". The contract is personal to the Customer who shall not assign the benefit whereof without the Company's written consent.

2. Quotations

Any quotation given by the Company is only an invitation to the Customer to make an offer and no order of the Customer is placed with the Company in pursuance of a quotation or the rise shall be binding on the Company unless and until it is accepted by the Company in accordance with these terms and conditions.

Any contract made between the Company and the Customer (hereinafter called "the Contract") shall incorporate and be subject to these conditions according to their provisions.

No purchase conditions of the Customer shall be valid or apply unless expressly accepted in writing by a Director of the Company.

3. Prices

Unless it is a term of the Contract that the price quoted by the Company shall remain fixed, the price shall be the Company's price ruling at the date of despatch of the goods.

4. Despatch

Whilst the Company will make every endeavour to comply with any date of dates for despatch or delivery of the goods stated in the Contract, such date or dates shall constitute only statements of expectation and shall not be binding on the Company. If the Company fails to despatch or deliver the goods by such date or dates, failure shall not constitute a breach of the Contract and the Customer shall not be entitled to treat the Contract as thereby repudiated or to rescind it or any related contract in whole or in part or claim damages for such failure.

5. Delivery

(a) Unless otherwise provided in the Contract, delivery shall be to the Customer's premises.

(b) Unless otherwise provided in the Contract, the price of the goods does not include the cost of off-loading the goods, which shall be arranged by the Customer and performed at his sole expense and risk.

6. Risk

(a) Where the Company itself delivers the goods, the risk shall pass to the Customer on delivery. In all other cases, the risk shall pass to the Customer when the goods leave the Company's premises.

(b) Where the Company itself delivers the goods, the Company undertakes to replace or (at its discretion) to repair free of charge any goods damaged in transit in which event the time for delivery of the goods shall be extended for such period as the Company reasonably requires for such replacement and repair. It is a condition precedent of this undertaking that (i) the Customer shall give written notice of such damage in transit with reasonable particulars thereof to the Company within 3 days of receipt of the goods and (ii) the Customer, if requested by the Company to do so, shall return the damaged goods to the Company within 2 weeks of his receipt thereof.

7. Limitation of Liability

(a) The Company's liability to the Customer in respect of the direct and/or indirect consequences (including, but not being limited to, death, injury, illness, disease, loss (whether financial or otherwise) or damage (save those of death of or personal injury to human beings resulting from negligence) or any breach or non-performance of this contract, howsoever caused or arising, or of negligence or of any misrepresentation or any other tort or breach of statute on the part of the Company or its agents, shall be limited to the price of the goods the subject matter of the particular consignment.

(b) It is the exclusive responsibility of the Customer to satisfy himself that the goods are suitable for the particular purpose for which he requires them notwithstanding that he may make known such purpose to the Company and the Customer shall not in this respect rely upon the Company's skill or judgement or any advice it may give. Accordingly Section 14(3) of the Sale of Goods Act 1979 shall not apply to the Contract and the Company shall not be liable to the Customer for damages in negligence in respect of any such advice or for failure to exercise proper skill and judgement.

8. Indemnity

The Customer will indemnify the Company against any claim made against the Company in respect of any injury to any person or damage to any property arising from any defect in the goods or anything done or omitted to be done in the delivery

thereof to the Customer where such delivery is effected by the Company including any such injury or damage caused by the negligence of the Company its employees or agents.

9. Title

(a) Notwithstanding that the risk in the goods has passed to the Customer the ownership of the goods shall remain with the Company, which reserves the right to dispose of the goods until payment in full for all the goods has been received by the company in accordance with the terms of this contract or until such times as the Customer sells the goods to its customers by way of bona fide sale at full market value.

(b) The goods shall so far as practicable be kept separate from other goods on the premises of the Customer and so as to be readily identifiable as the goods of the Company.

(c) If payment is overdue in whole or in part the Company may (without prejudice to any of its other rights) recover or resell the goods or any part thereof and may enter upon the Customer's premises by its servants or agents for the purpose. Such payments shall become due immediately upon the commencement of any act or proceeding in which the Customer's solvency is involved.

(d) If any of the goods are incorporated in or used as materials for other goods before such payment the property in the whole of such goods shall be and remain with the Company until such payment has been made, or the other goods shall have been sold as aforesaid, and all the Company's rights hereunder in the materials shall extend to those other goods.

(e) Until the Company is paid in full for all the goods the relationship of the Company to the Customer shall be fiduciary in respect of the products or other goods in which they are incorporated or used and if the same are sold by the Customer the Company shall have the right to trace the proceeds thereof according to the principles in *Re Hallett's Estate* (1880) 13 Ch D 696, (1874-80) All ER Rep 793. A like right for the Company shall apply where the Customer uses the goods in any way so as to be entitled to payment from a third party.

(f) Nothing in this Clause shall confer any right upon the Customer to return the goods sold hereunder or to refuse or delay payment therefore.

10. Accounts

(a) All accounts shall be paid by the 20th day of the month following the Company's invoice.

(b) Where any sum owed by the Customer to the Company under the Contract is overdue, or if at any time the credit standing of the Customer has in the opinion of the Company been impaired for any reason, the Company may in its own absolute discretion demand payment of all outstanding balances whether due or not and/or cancel all outstanding orders and decline to make further deliveries except upon receipt of cash or satisfactory security. The setting off or withholding of payment by the Customer in respect of any claim shall not be allowed unless expressly agreed by the Company in writing.

(c) The Company reserves the right to charge interest on any invoice not paid at the rate of 5% per annum over LIBOR from the date on which payment is due until actual payment.

11. Specification and Quantities

(a) Unless the Contract expressly provides otherwise, all weights, dimensions, statements as to performance and any other data relating to the goods supplied by the Company are approximate only.

(b) Whilst the Company will make every endeavour to deliver the quantity of goods ordered, nevertheless a delivered quantity of 10% more or less than the quantity ordered shall be deemed to be due execution and performance of the Contract, the price being increased or reduced pro rate accordingly.

(c) The Company may ship or deliver by instalments and each instalment shall be deemed to be sold under a separate contract.

12. Packing Cases

Unless otherwise provided in the Contract, the price does not include the cost of cases or other packing materials which shall remain the property of the Company and be returned in good condition to the Company's premises at the Customer's expense within two months of delivery.

13. Customer's Property

Customer's property and all property supplied to the Company by or on behalf of the Customer will be held and carried at the Customer's risk.

14. Tools

Tools manufactured or provided by the Company for the production of any goods shall remain the property of the Company notwithstanding the Customer may have been charged for all or part of the cost of such manufacture or provision. The Company reserves the right to destroy or

otherwise dispose of any tools which have not been used for a period of two years.

15. Force Majeure

The Company will make every effort to carry out the Contract in accordance with its terms but it shall not be liable for any failure on its part to perform any term of the Contract arising from any cause outside the Company's control including (but without prejudice to the generality of the foregoing) act of God, war, strike, lock-out or other industrial dispute, fire, flood, shortages of materials or breakdown of machinery or plant and in these circumstances the Company expressly reserves the right to cancel or suspend the whole or any part of any delivery.

16. Disputes

The Contract shall be governed by and construed in accordance with English Law. All questions, disputes or controversies whatsoever arising out of or in relation to or in connection with the Contract or the goods supplied or to be supplied pursuant hereto shall, if not settled by agreement, be referred to the arbitration of a person appointed by the Company and the Customer or in default of such appointment shall be referred to the arbitration of a person appointed by the President for the time being of the British Plastics Federation and the arbitration shall be subject to the Arbitration Act 1950 as modified or re-enacted from time to time.

Area Sales Territories

South East Region

Sales Contact: 07775 704426

BH, BN, BR, CR, CT, DA, DT, GU, GY, HA, HP, JE, KT, ME, PO, RG, RH, SL, SM, SO, SP, TN, TW, UB, WD.

South West Region

Sales Contact: 07831 241629

B, BA, BS, CF, CV, DY, EX, GL, HR, LD, NP, OX, PL, SA, SN, TA, TQ, TR, WR.

London & East Anglia Region

Sales Contact: 07795 962091

AL, CB, CM, CO, E, EC, EN, IG, IP, LU, MK, N, NN, NR, NW, PE, RM, SE, SG, SS, SW, W, WC.

North Midlands

Sales Contact: 07831 558951

CH, CW, DE, HU, LE, LN, L, LL, NG, S, SK, ST, SY, TF, WA, WS, WV.

North Region

Sales Contact: 07768 740532

AB, BB, BD, BL, BT, CA, DD, DG, DH, DL, DN, EH, FK, FY, G, HD, HG, HS, HX, IM, IV, KA, KW, KY, LA, LS, M, ML, NE, OL, PA, PH, PR, SR, TD, TS, WF, WN, YO, ZE.



Cox Building Products Warranty

“Cox Building Products’ domes and 35°/45° pyramids, glazed with enhanced polycarbonates, will not leak or show excessive changes in colour or loss of light transmission, nor will they break due to loss of impact strength, due to weathering, within 10 years from the date of sale.”

The glazing materials covered by this Warranty are clear, bronze and obscure grades.

This Warranty is valid for the period of 10 years from the date of sale and is subject to the following conditions:

1. The product has been correctly installed and maintained in accordance with Cox Building Products’ written fixing and maintenance instructions.
2. The product must be transported and stored, prior to installation, in accordance with Cox Building Products’ recommendations.
3. The Warranty will not apply if the product has been scratched, abraded or exposed to corrosive materials.
4. Change in colour will be measured by a yellowness index test to ASTM D1925 (1977). Material displaying a change of 10 delta from the original value will not be subject for a claim.
5. The change in light transmission will not be greater than 6% compared with the original value. The test will be ASTM D1003 (1977).
6. Determination of loss of impact strength, due to weathering, will be conducted to DIN 52290 Part 4, level A1.
7. In the event of a claim, the goods must have been paid for in full and proof of purchase must be provided.
8. In case of complaint, Cox Building Products must be provided with free of charge uninterrupted access in order to inspect, repair or replace a faulty product.
9. Cox Building Products will endeavour to carry out a replacement/repair with a minimum of delay but shall not be liable for the consequence of any delay in carrying out the repair/replacement, whatever its duration or cause and Cox Building Products shall not be liable under this Warranty for any indirect financial or consequential loss resulting from or arising in connection with the defective product.
10. The warranty on electrical and pneumatic operating mechanisms and decorative finishes is limited to that given by the equipment manufacturer.
11. This Warranty is valid only to products installed in the UK and is subject to the Law of England.

Cox Building Products Limited

Unit 1, Shaw Road, Bushbury
Wolverhampton WV10 9LA

Tel: 01902 371800

Fax: 01902 371810

Email: sales@coxdome.co.uk

www.coxbp.com

© Cox Building Products Ltd 2007.
COXNLS/PS10/07

